



# DOSATRON®


WATER POWERED DOSING TECHNOLOGY

## 40 GPM: D8RE2VFBPHY

### Product Specifications

**Call 800-523-8499 to order the Dosatron for your specific application**

<b>Dilution Range:</b>	1:500 to 1:50 (.2% to 2%)
<b>Water Flow Range:</b>	2.2 to 40 GPM
<b>Operating Pressure Range:</b>	2.2 to 116 PSI
<b>Available Housing Materials:</b>	Polypropylene
<b>Dimensions:</b>	25 1/4" x 8 1/2"
<b>Weight:</b>	12 lbs
<b>Connection Size:</b>	1 1/2" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	6 ft clear suction tube, weighted strainer, mounting bracket and operating manual
<b>Recommended Accessories:</b>	6 ft clear suction tube, strainer, weight, mounting bracket, bypass, union, and operating manual.
<b>Optional Accessories:</b>	200 mesh filter, check valve, pressure regulator, flow restrictor

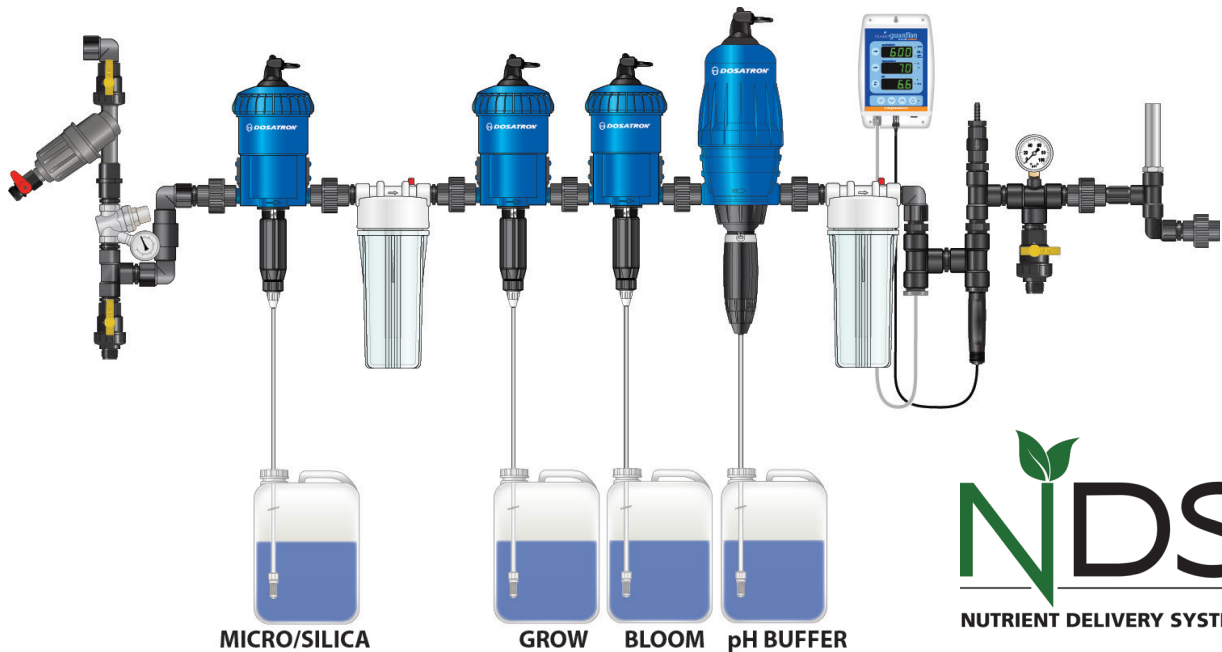

The Nutrient Delivery System is customizable. More dosers can be added as needed.

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • www.dosatronusa.com**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.